



## MOUNTING SUGGESTIONS:

### Victory Vegas/Kingpin/High-Ball '03-17 - Solo and Passenger Seat

<b>Hardware:</b>	<b>Solo seat:</b> Stock side Allen bolts x 2	<b>Passenger seat:</b> 13mm x 8mm hex bolts x 4
	<b>Opt. Luggage Rack Relocation:</b> 1/4"-28 x 3/8" Allen bolt x 2 1/4"-28 lock nut x 2	
<b>Tools needed:</b>	6mm Allen wrench 13mm socket wrench.	

**Note:** This seat will not fit with the Tour-Pak on Kingpin Tour models or the luggage rack on 2012 and up Vegas models. The Mustang solo will not fit with the stock passenger seat. This seat will not fit Jackpot models.

#### Removal of Stock Seat:

1. Pull out on side covers to remove them from the motorcycle.
2. Remove the two solo mounting bolts using a 6mm Allen wrench. Lift solo straight up off the frame.
3. Remove the four chrome fender strut bolts using a 6mm Allen wrench. Remove strut from fender.
4. Remove the four seat bracket bolts with a 6mm Allen wrench, and lift passenger seat up and off the fender.



### **Installation of Mustang Seat:**

1. Slide the front of the solo into the "V" of the fuel tank, then lower the seat onto the frame. The seat will be snug on the tank as it is being positioned.
2. Align the solo's side brackets with the frame mounts and secure with the stock bolts using a 6mm Allen wrench.




3. Align the passenger seat's bracket legs with the four fender mounts and secure with the supplied 13mm x 8mm bolts using a 13mm socket wrench.
4. Reinstall the struts with the stock chrome bolts and secure with a 6mm Allen wrench.

### **Relocation of Kingpin Luggage Rack:**

1. Drill through the two rivets fastening the U-bracket to the luggage rack with a  $\frac{3}{16}$ " drill bit.
2. Using a  $\frac{1}{4}$ " bit, drill two new holes through the luggage rack  $2\frac{1}{4}$ " forward of the old holes.



3. Drill U-bracket legs from  $\frac{3}{16}$ " holes to  $\frac{1}{4}$ ". Install supplied  $\frac{1}{4}$ "-28 x  $\frac{3}{8}$ " Allen bolt and lock nut through one side of rack and bracket. Bend bracket to reach other side of rack, then install second Allen bolt. Install luggage rack to the backrest and U-bracket to the top of the license plate mount.

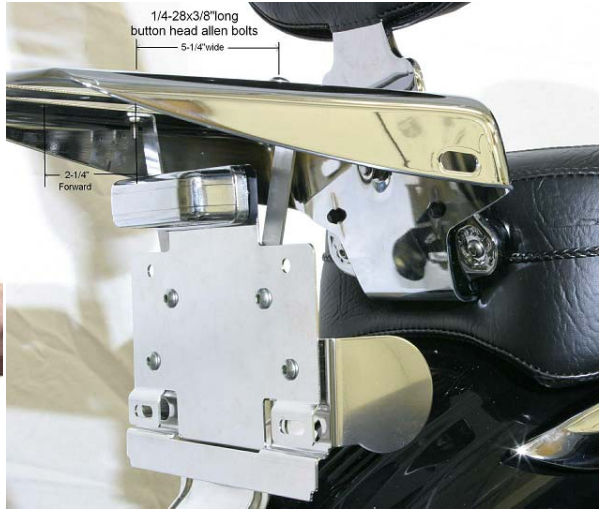

**Enjoy the comfort and custom look of your new Mustang seat!**



These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to [questions@mustangseats.com](mailto:questions@mustangseats.com) or visit our website at [www.mustangseats.com](http://www.mustangseats.com).

For care and maintenance of our seats, please go to our website under "Support".

Refers to part numbers: 76510, 76511, 76512, 76513, 76514, 76515, 79380, 79381, 79382, 79383, 79384, 79385

**You are cordially invited to**  
**— Tour the Mustang Factory —**

See how our craftspeople take pride in transforming raw materials into the world's highest quality, most comfortable handcrafted seats. Please contact Mustang for more information regarding tours of our historic Three Rivers, Massachusetts, facility (only 75 miles west of Boston; 150 miles northeast of New York City). Our two hour tours are by reservation only; we can accommodate groups from 2 to 24. We promise you will ride away with an entirely new awareness of what you put between you and your bike.