



# Mounting Suggestions for the Yamaha Royal Star Deluxe 2005-2009 Two-Piece Seat

## Tools Required:

- 5 mm Allen Wrench
- 10 mm Open-End Wrench

## Hardware:

- Stock Mounting Bolts



## Baseplate Features:

The two-piece, marine-grade fiberglass baseplate directly replaces the stock two-piece seat. Rubber bumpers are positioned to prevent the seat from touching the frame and fender.

## Stock Seat Removal Steps

1. Remove solo seat first. Use a 5 mm Allen wrench to remove the two front 8 mm solo mounting bolts.
2. Lift nose of seat up and then forward to disengage it from frame.
3. Use a 10 mm open-end wrench to remove the 8 mm hex head mounting bolt from the rear fender. Slide rear seat forward to disengage it from fender bracket and lift off.

Step 1




Step 2



Step 3



With Stock Seat Removed

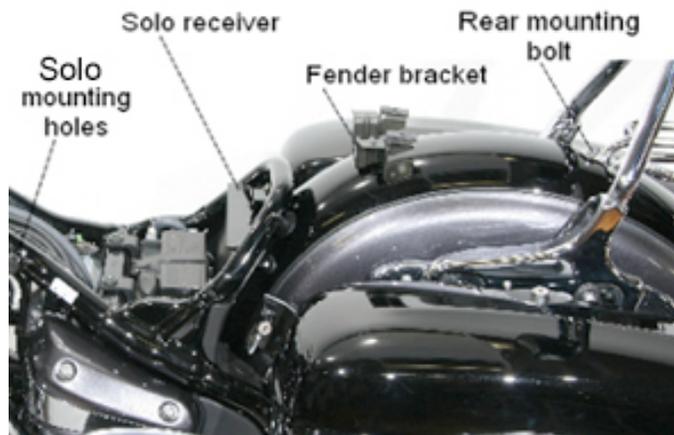

## **Mounting of Mustang Seat**

1. Passenger seat is mounted first. Center passenger seat on fender then slide it back to engage brackets on front passenger seat under bike's fender bracket..
2. Line up rear triangle bracket with hole in fender then install stock 8 mm bolt. Tighten with a 10 mm open-end wrench.
3. Angle the solo back and engage the seat bracket into bike's receiver. Bring nose of solo down and align seat side brackets with holes in frame. Install two stock 8 mm Allen bolts then tighten with a 5 mm Allen wrench.

Step 1



**Enjoy the comfort of your new Mustang Seat!**



These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to [questions@mustangseats.com](mailto:questions@mustangseats.com) or visit our website at [www.mustangseats.com](http://www.mustangseats.com).

For care and maintenance of our seats, please go to our website under "Support".

Ref. part #'s 76550, 76551, 79420, 79421