




MOUNTING SUGGESTIONS:

Yamaha Royal Star Venture 1999-2013 One-piece Seat

Hardware:	$\frac{1}{4}$ "-20 flange nut x 2 Rubber washer x 2
Tools needed:	$\frac{7}{16}$ " wrench

Removal of stock seat:

1. Remove the two nuts from under the front of the seat.
2. Lift the solo up and off the motorcycle.
3. Locate and remove the two bolts from the front of the passenger seat.
4. Slide the rear seat up and forward to disengage from the bracket and remove the seat.

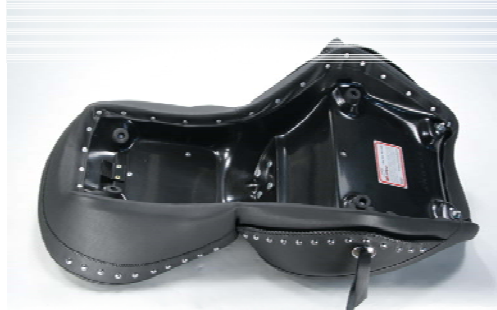

Installation of Mustang seat:

1. Remove the two $\frac{1}{4}$ "-20 flange nuts from the front of the seat. Leave the rubber washers in place.
2. Slide the seat's rear bracket back under the fender bracket.
3. Align the threaded studs at the nose of the seat with the two front mounting holes. The rubber washers sit between the seat and the frame.
4. Install and tighten the two flange nuts with a $\frac{7}{16}$ " wrench.

Enjoy the comfort and custom look of your new Mustang seat!



These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Refers to part numbers: 76258, 76259, 79618, 79619

**You are cordially invited to
— Tour the Mustang Factory —**

See how our craftspeople take pride in transforming raw materials into the world's highest quality, most comfortable handcrafted seats. Please contact Mustang for more information regarding tours of our historic Three Rivers, Massachusetts, facility (only 75 miles west of Boston; 150 miles northeast of New York City). Our two hour tours are by reservation only; we can accommodate groups from 2 to 24. We promise you will ride away with an entirely new awareness of what you put between you and your bike.